


TEMPEST INDIRECT SLIMLINE

TECHNICAL DATA

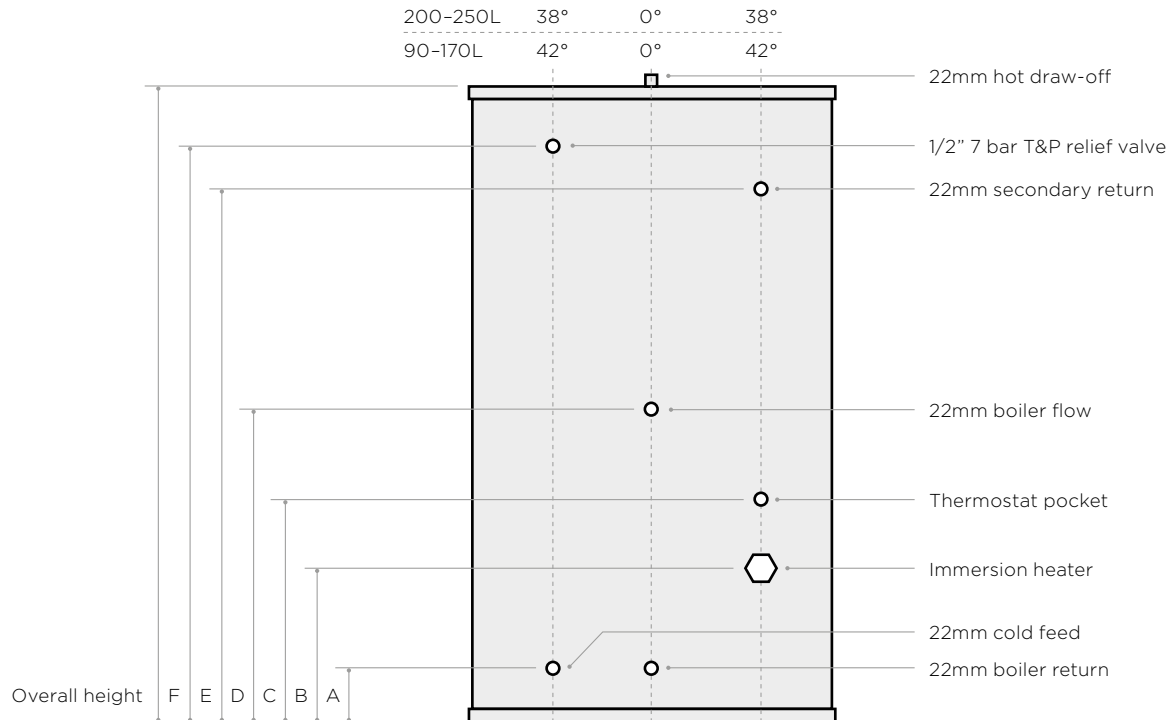

Capacity (L)	90	125	150	170	200	250
Height (mm)	900	1050	1200	1500	1800	1800
Diameter (mm)	470	470	470	470	470	510
A (mm)	170	170	170	170	195	195
B (mm)	200	200	200	200	225	225
C (mm)	400	400	400	450	475	555
D (mm)	495	495	495	600	625	825
E (mm)	-	-	-	-	1045	1465
F (mm)	710	860	1010	1305	1605	1615

Capacity (L)	90	125	150	170	200	250
Reheat from cold (minutes)	26	36	37	36	33	35
Reheat from 75% draw-off (minutes)	18	25	26	25	24	25
ERP Rating*	C	C	C	C	C	C
Immersion Rating (kW)	3	3	3	3	3	3
Standing Heat Loss (kWh/24hrs)	1.37	1.48	1.72	1.92	2.04	2.16

*Based on thermostat set a 60°C