


# TORNADO INDIRECT

## TECHNICAL DATA

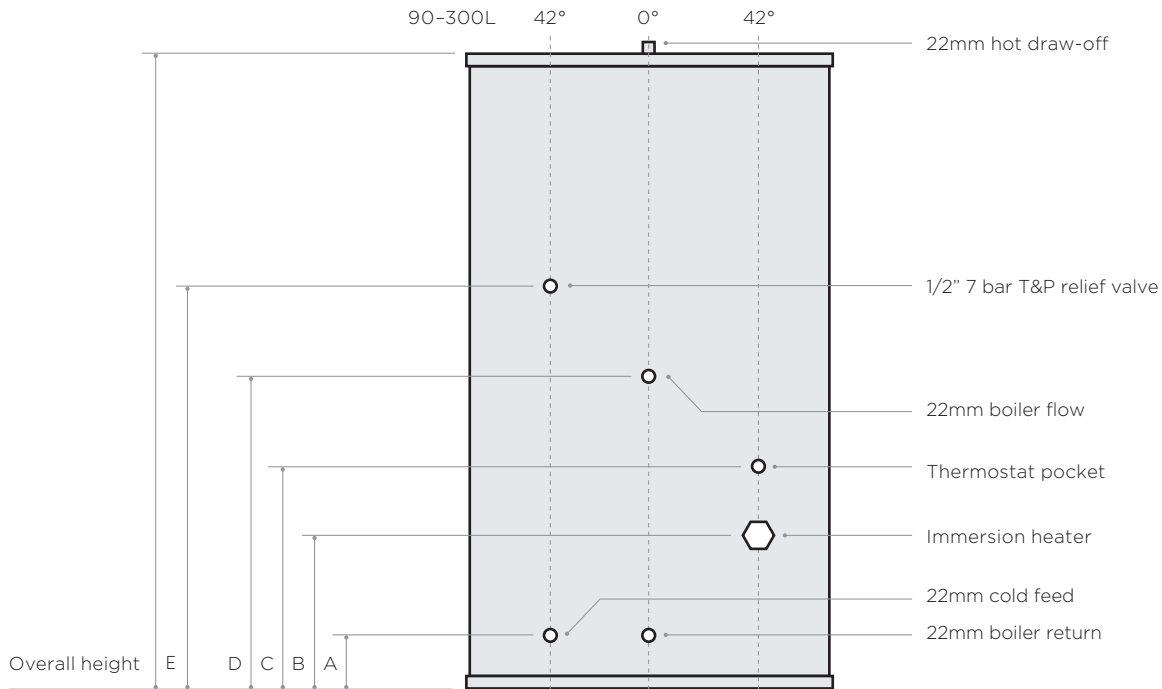

Capacity (L)	125	150	170	200	250	300
Height (mm)	1025	1260	1325	1550	1800	2050
Diameter (mm)	580	580	580	580	580	580
A (mm)	178	178	178	178	178	178
B (mm)	248	248	248	248	248	248
C (mm)	495	495	495	495	495	495
D (mm)	505	505	605	605	825	825
E (mm)	800	950	1065	1150	1350	1500

Capacity (L)	125	150	170	200	250	300
Reheat from cold (minutes)	36	37	36	33	35	40
Reheat from 75% draw-off (minutes)	25	26	25	24	25	29
ERP Rating*	C	C	C	C	C	C
Immersion Rating (kW)	3	3	3	3	3	3
Standing Heat Loss (kWh/24hrs)	1.21	1.36	1.40	1.64	1.71	1.82

\*Based on thermostat set a 60°C